


УЧЕТНИЙ ДК  
IS "FSC"

A.109

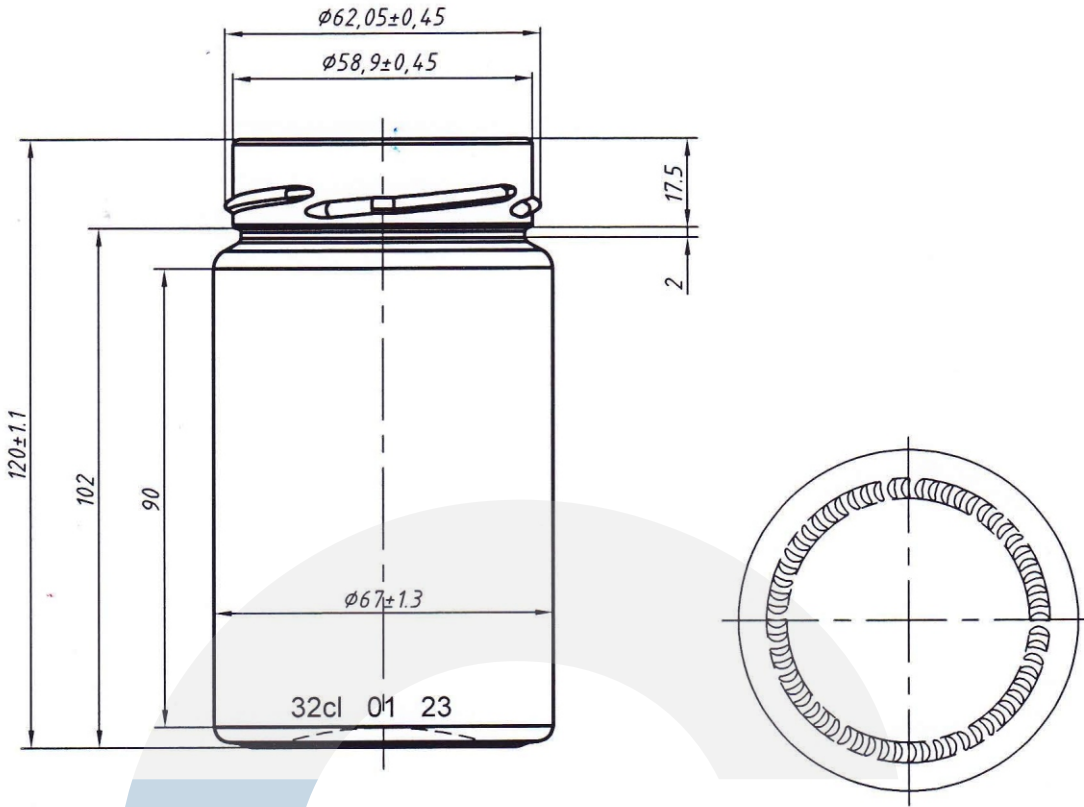

The controllable sizes of the glass finish:  
 $\phi 62,05 \pm 0,45$   
 $\phi 58,9 \pm 0,45$

Finish type III-63 (deep)

Bottom view



Characteristics

Full capacity,  $\text{cm}^3$  -320±9  
 Weight recommended, g -190

SF-37780441-003:2010; GOST 5717.1



Thickness of walls not less, mm-1,4 ,at application of hardening-1,2  
 Thickness of a bottom not less, mm-2,0  
 Thermal stability ,difference of temperatures, not less, °C -40  
 Internal hydrostatic pressure during 5s not less,  $\text{kgf/cm}^2$ -3  
 Resistance to effort of compression not less, N-2200

Maximum deviations

on height, mm ±1.1  
 on diameter, mm ±1.3  
 Concavity of an end face of a nimbus mouth no more, mm 0,3  
 Other dimensions are for manufacturing of mold sets

Agreed:

The packing scheme of the jars in the pallet

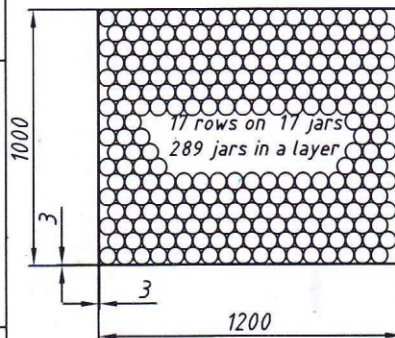

Quantity of layers: 14  
 Quantity of jars in the pallet: 4046  
 Weight of the pallet, kg: 832  
 Roof: a cardboard  
 Cover: thermocontractable

A.109

Chief	Letter	Document N	Signature	Date
Designed		Cosovschi P.		04.12.23
Const. principal		Cosovschi P.		04.12.23
Dir. of manuf.		Baltajji I.		

Jar  
 III-63-320 "Pomodoro deep"

Letter	Weight	Scale
		1:1
Sheet	Sheets	1