

# BZ-CPS-202-A133

STOLLE SELOE RCMD - 202 ISE

Status: Approved

Issue Date: 28 March 2018

Version Number: 2

Authorised By: Florent Gourven

#### Crown Bevcan, Europe & Middle East


www.crowncork.com

Component Weight:	2.49g	
Compound Weight:	21mg +/- 6	
Nominal Material Thickness :	0.208mm	
Component Lacquered Material Thickness :	0.218mm nom.	
Minimum Peaking Pressure :	6.2bar	
Minimum Vent Pressure :	6.2bar	
Internal Lacquer Specification :	PVC Free	
External Lacquer Specification :	Ероху	
Lining Compound Specification :	Water Based	
Compound Placement :	High on Shoulder (HOS)	
Stacking Rate :	26 +/- 2 per 50.8mm	



### **End Specification**

Entity Code	Entity Description	Value	Tolerance
ED	Curl External Diameter	59.33 mm	±.25
EL	Curl Tip Diameter	57.66 mm	min.
EB	Curl Height	1.98 mm	±.15
HK	Converted Countersink Depth	6.17 mm	±.13
EJ	Compound Shoulder Clearance	5.60 mm	±.50
EK	Compound Edge Clearance	1.00 mm	±.50

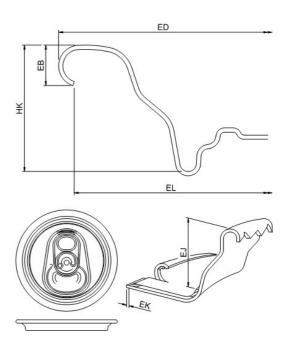

Printed documents not controlled. This data is supplied expressly for the customers of CROWN. All information contained herein is confidential and must not be reproduced, copied or disclosed to others.



# BZ-CPS-202-A133

STOLLE SELOE RCMD - 202 ISE

Status: Approved

Issue Date: 28 March 2018

Version Number: 2

Authorised By: Florent Gourven

### Crown Bevcan, Europe & Middle East

www.crowncork.com

Plants					
Country	Name	Options			
Spain	Agoncillo				
•	•				